

High Performance
High Productivity
High Stability



Drilling

FEATURES

- Internal coolant design
- Unique UNIX coating improves tool life
- Optimized flute improves drilling efficiency
- Customized available
- Diameter 0.2-3.9mm
- 高效內冷孔
- **UNIX** 鍍膜提升刀具壽命
- 優化排屑槽，提升刀具效能與壽命
- 提供客製化服務
- 尺寸範圍 0.2-3.9mm

Solid Carbide Drills


Appearance	Items	Series	Coolant	ØRange	Degree Tip Angle	Page
------------	-------	--------	---------	--------	------------------	------

DL Series for Mini Hole (Reinforced Shank)

	DLC Solid Carbide Drills - 3~4×D (for Mini hole) 內冷小徑鎢鋼鑽頭	DLC	Internal	Ø2.0~Ø3.9	130, 140	C022
	DLN Solid Carbide Drills - 3×D (for Mini hole) 外冷小徑鎢鋼鑽頭	DLN	External	Ø0.2~Ø2.9	130	C023

內冷小徑鎢鋼鑽頭

- 3~4×D Cutting depth
- Reinforced Shank
- 130°, 140° Tip Angle
- Internal Coolant
- UNIX Coating
- Tolerance h8
- Double Margins Design
- SX Design
- For Alloy Steel, Stainless Steel and Cast Iron.

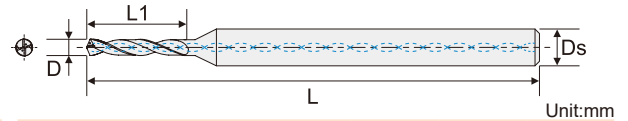


DLN Solid Carbide Drills - 3×D (for Mini hole)

外冷小徑鎢鋼鑽頭

P	M	K	N	S	H
●	○	●			

Product Specs

- 3xD Cutting depth
- Reinforced Shank
- 130° Tip Angle
- External Coolant
- UNIX Coating
- Tolerance h8
- NX Design
- For Alloy Steel and Cast Iron.

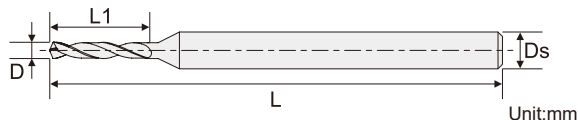

Unit:mm

[illegible]

Drilling